
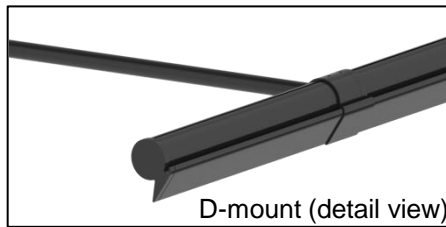




Harvard Club, Boston, MA | Photography: Courtesy of Emily O'Brien Photography


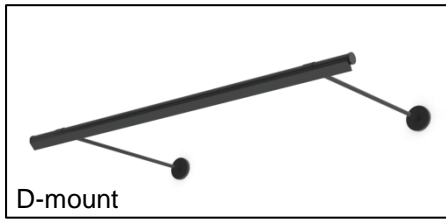


Features

- Endless variety of configurations to suit any artwork or gallery
- Small, elegant adjustable hub hangers for any mounting condition
- Built-in visor and optional baffle for glare shielding
- Adjustable and lockable aiming
- Up to 1900 delivered lumens per foot
- Static white (2200K, 2700K, 3000K, 3500K), Dim-to-Warm (1800K-3000K), Tunable White (2700K-6500K) or RGBW

Performance

Precisely extruded acrylic lens produces an asymmetric distribution ideal for illuminating vertical surfaces evenly from top to bottom

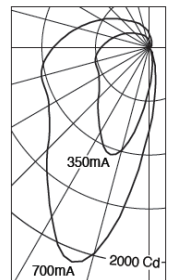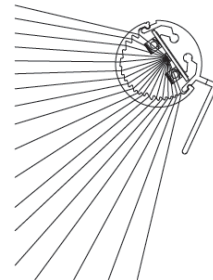

For LM79 and photometric reports, visit thelightingquotient.com L85[17k] > 104,000 hrs. @ 25°C per TM-21

Contact sales@thelightingquotient.com

PROJECT **TYPE**



CATALOG NUMBER

1 STYLE

artZi = Linear Adjustable Portrait Luminaire

2 OUTPUT / POWER

- L** = Low output (3.3 watts per foot)
- S** = Standard output (6.5 watts per foot)
- H** = High output (13 watts per foot)

3 LENGTH

ORDER CODE	LENGTH	LUMENS	INPUT WATTS*
08	8 inch (L,R)	1903	15
14	14 inch (T)	3807	30
24	2'	3720	28
36	3'	5581	41
48	4'	7441	55
60	5'	9301	69
72	6'	11161	83

*Based on 3000K, 90+CRI at high output
See [Scaled Performance Table](#)

4 MOUNTING

- D** = Linear center luminaire (specify center segment length in inches, with (2) 8 inch long end units. 16 inch long stems and hardware provided (see pg 3)
- L** = Single 8 inch long unit offset left
- R** = Single 8 inch long unit offset right
- T** = Dual 8 inch long units with center single stem
- X** = Custom mounting, specify details

5 FINISH

- | | |
|------------------------------|------------------------------|
| 02 = Semi-gloss White | 19 = Vista Black |
| 22 = Matte White | 26 = Greige |
| 06 = Dark Bronze | 27 = Flat Ivory White |
| 07 = Mercedes Silver | 28 = Charcoal |
| 08 = Semi-gloss Black | 29 = Platinum Gold |
| 13 = Matte Black | 30 = Krome |
| 15 = Metallic Silver | 31 = Triple Bronze |
| 17 = Champagne | 32 = Burnished Brass |
| 18 = Copper | |

Some finishes are non-cancellable, consult factory

6 VOLTAGE

M = 120-277V Universal voltage input

7 OPTIONS (see *Accessories Section* for specifications)

- 0** = No options
- B** = Cross baffle, provides 25° lateral shielding
- G** = Gradient backsplash reduction film

8 DESTINATION REQUIREMENT

- O** = CSA certified for U.S.
- J** = CSA certified for Canada

9 COLOR TEMPERATURE / CRI

- 922** = 2200K, 90+ CRI
- 927** = 2700K, 90+ CRI
- 930** = 3000K, 90+ CRI
- 935** = 3500K, 90+ CRI
- H27** = 2700K, **95+** CRI
- D2W** = Dim-to-Warm 2200K-3000K, 90+ CRI, other CCTs available
- TWH** = Tunable White; 2700K-6500K, 90+ CRI
- RGB** = Color Tunable; RGBW with 3500K, 90+ CRI white

NOTE: Additional CCT and CRI options are available; consult factory.




10 DIMMING

- 00** = Non-dimming
- TD** = ERP forward or reverse phase 120V only, dimming 100%-6%, 120V phase controls by others
- TC** = ERP 120-277V, dimming 100%-1%, **Casambi** wireless module
- ZX** = 0-10V analog dimming 120-277V input, dimming 100%-1%, 0-10V controls by others
- EL** = 0-10V eldoLED SOLOdrive, 120-277V input, dimming 100%-0.1%, 0-10V controls by others
- ED** = DALI eldoLED SOLOdrive, 120-277V input, dimming 100%-0.1%, DALI controls by others
- DZ** = D2W or TWH 2-Channel driver for use with 0-10V controls by others
- DD** = D2W or TWH 2-Channel DALI driver (DALI controls by others)
- DA** = RGBW 4-Channel DMX with **Casambi** wireless module
- DM** = RGBW 4-Channel eldoLED LINEARdrive (DMX controls by others)

Example (see page 3): artZi-S-48-D-17-M-0B-0-927-TD

artZi luminaire, standard output (6.5 watts per foot), 48 inch center-to-center of mounting hubs, luminaire flanked by 8 inch luminaires, champagne finish, 120V, 25° cross baffle, CSA certified for U.S., 2700K, 90+CRI, forward or reverse phase dimming driver, 120V phase controls by others.




Portrait Light with remote driver


Example: = 4ft length with 12" arms



Luminaire Side View

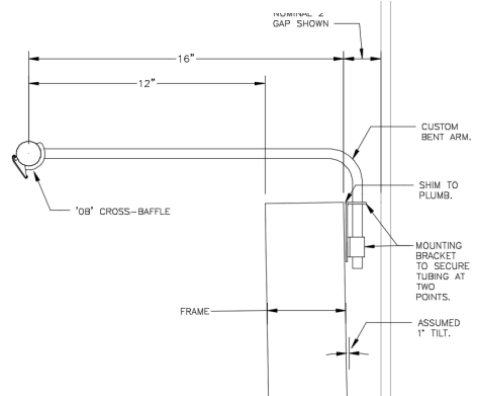

Luminaire Front View with Remote Driver wiring

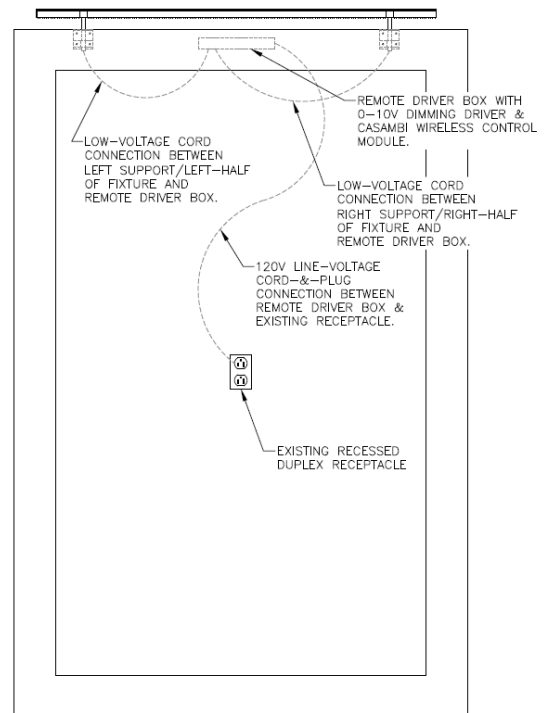

Before



Illuminated by artzi

